

DE1100/125



SOLIDS
HANDLING



DEWATERING

FLOW @ BEP	HEAD @ BEP	SPEED @ BEP	EFFICIENCY @ BEP
1097 m ³ /hr 4830 usgpm	126 mtrs 413'	2000 rpm	82%

AT A GLANCE

Suction Size	250 mm	10"
Discharge Size	200 mm	8"
Solids Handling	62 mm	2.44"
Max Flow	1475 m ³ /hr	6494 usgpm
Max Head	165 m	541'
Max Speed	2100 rpm	

DIESEL ENGINE SPECIFICATION

CHOOSE DIESEL

Fuel Tank Size	450 ltrs	119 usg
Fuel Burn/hr @ BEP	138 ltrs/hr	36.50 usgph
Rated Power @ BEP	254 kW	341 hp
Model	Scania DC16	
Emissions	EU Stage V	
Max Power	566 kW	759 hp

ELECTRIC MOTOR SPECIFICATION

CHOOSE ELECTRIC

PLEASE GET IN TOUCH FOR MORE DETAILS

☎ +44(0)1473 833939

✉ SALES@DXBINTEGRATE.COM

🌐 WWW.DXBINTEGRATE.COM

FEATURES & BENEFITS

Auto Start/Stop	Spark Arrestor
UK Manufactured	RIGSAFE Shutdown Valve
Indefinite Dry-Run capabilities	
Cycloseal – advanced mechanical seal that extends seal life, reduces seal failures and maximises uptime	

1.69 HOURS

To empty an Olympic Swimming Pool (2,500,000 litres) at Max Flow (1475 m³/hr)



DXB9

PLEASE GET IN TOUCH FOR MORE DETAILS ON PUMP SIZE

PUMP SPECIFICATION

Model	8NHG19	
Priming System	Type: Cornell liquid tolerant diaphragm vacuum pump 	Air Removal Capability: 50 cfm Priming Chamber: Cornell optimised priming chamber design and valve linkage for maximum reliability and zero carryover Discharge Check Valve: Patented Cornell Non return valve with optional 90 degree discharge and heavy duty flapper Run Dry: Indefinite capability
	Type: Three Vane Enclosed Solids Handling Impeller design for large spherical solids pass through whilst providing optimal efficiency Size: 495 mm (19.50")	
	Volute: Heavy duty GG30 Gray Iron with 125# flanges Mechanical Seal: Tungsten Carbide v Silicon Carbide	
Bearing & Shaft	Heavy-duty bearing housing with dual angular contact bearings on drive end and heavy duty shaft	






ALL DATA IS FOR GUIDANCE PURPOSES ONLY

☎ +44(0)1473 833939 | ✉ SALES@DXBINTEGRATE.COM | 🌐 WWW.DXBINTEGRATE.COM

AROUND YOUR CLOCK, AROUND YOUR WORLD®

DE1100/125-0421

PERFORMANCE CHART (FOR GUIDANCE ONLY)

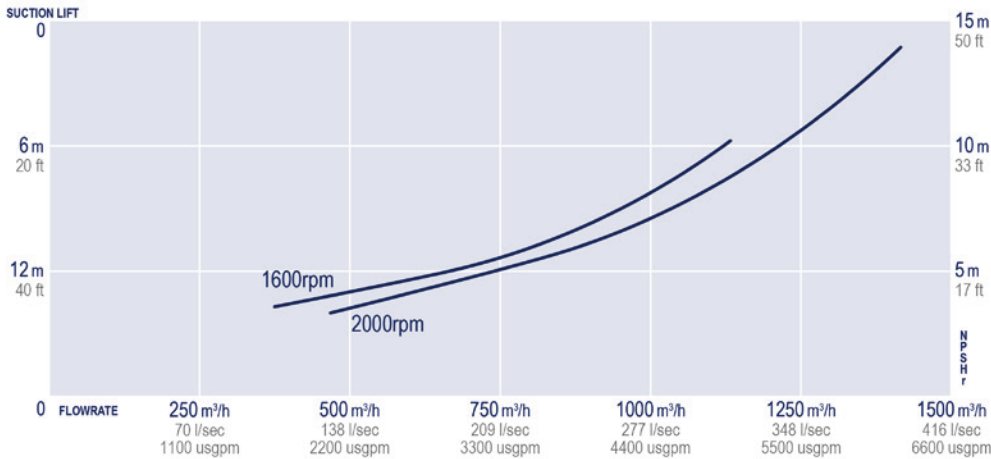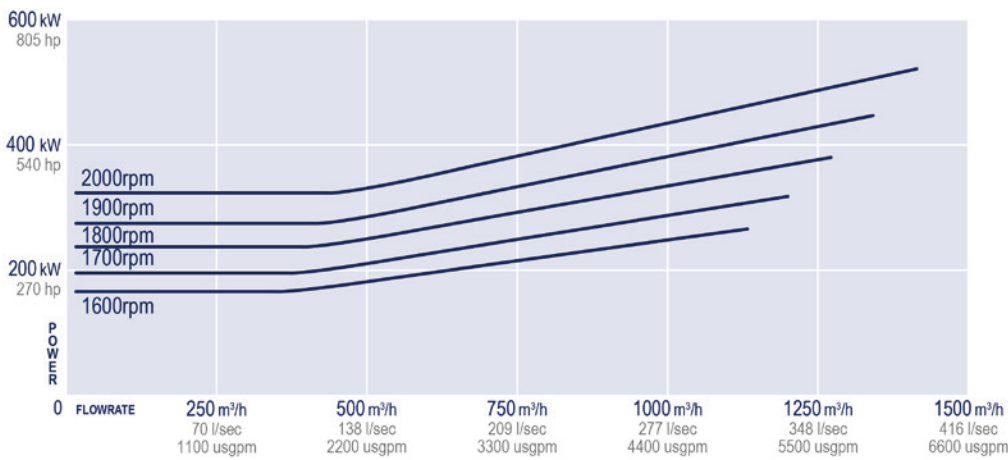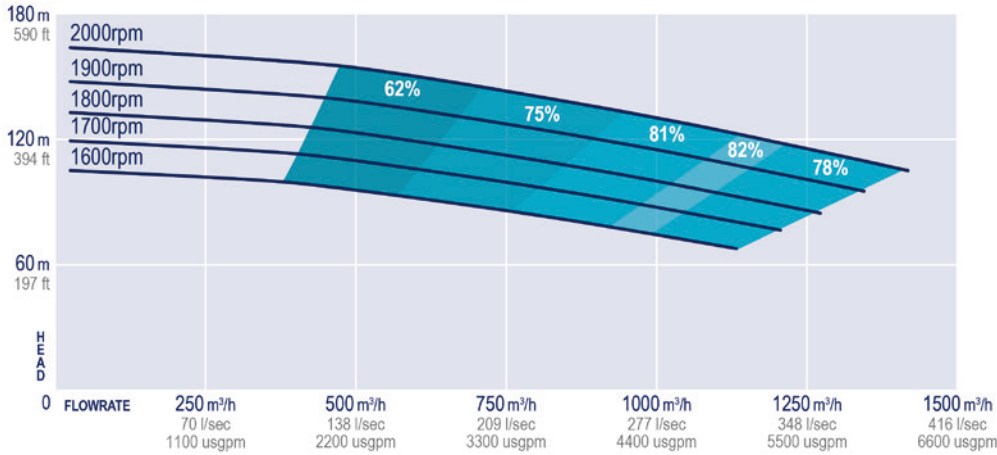

MARKETS



DXB, AT YOUR SERVICE



AROUND YOUR CLOCK, AROUND YOUR WORLD®

Anywhere, Anytime...
DXB specialise in designing bespoke solutions to your fluid handling challenges.



WORLD CLASS ECO-FRIENDLY PRODUCTS

Like you, we care about the environment, which is why our efficient pumpsets use stage 5 emission compliant engines as standard.



WARRANTY & AFTERCARE

Our aftermarket team are here to support your business for the life of the pumpset. All products come with market leading warranty period for the absolute peace of mind.



REAL TIME ASSET CONTROL

Downtime isn't an option. All our pumpsets can be remotely monitored for ultimate asset control and performance.



YOUR TRUSTED PARTNER

Our customers support us, we support them. We're partners!