DE350/150 SOLIDS HANDLING





FLOW	HEAD	SPEED	EFFICIENCY
@ BEP	@ BEP	@ BEP	@ BEP
350 m³/hr 1540 usgpm	150 mtrs 490 '	2100 rpm	71%

AT A GLANCE		
Suction Size	200 mm	8 "
Discharge Size	100 mm	4 "
Solids Handling	51 mm (min)	2 " (min)
Max Flow	545 m ³ /hr	2390 usgpm
Max Head	198 mtrs	650 '
Max Speed	2100) rpm

DIESEL ENGINE SPECIFICATION CHOOSE DIESE		CHOOSE DIESEL
Fuel Tank Size	450 ltrs	119 usg
Fuel Burn/hr @ BEP	60 ltrs/hr	15.85 usgph
Rated Power @ BEP	255 kW	342 hp
Model	Scania	DC13
Emissions	EU Stage V	
Max Power	300 kW	402 hp

ELECTRIC MOTOR SPECIFICATION CHOOSE ELECT		CHOOSE ELECTRIC
Model	WEG / ABB 41	5V 3 phase 50Hz
Standard	IE	EC3
Rated Power	315 kW	422 hp
Enclosure	TE	EFC
Nominal Speed	150	0 rpm
Frame	3	55

FEATURES & BENEFITS
Indefinite Dry-Run capabilities
Auto Start/Stop
UK Manufactured
Cycloseal – advanced mechanical seal that extends seal life, reduces seal failures and maximises uptime



To empty an Olympic Swimming Pool (2,500,000 litres) at Max Flow (545 m³/hr)

DXB6 DOB

NET WEIGHT 7000 kgs 15430 lbs

 $L \times W \times H$ 4.10 × 2.10 × 2.20 mtr 161 × 82 × 87

PUMP SPECIFICATION	
Model	CRP100NHTB495
	Type: Cornell liquid tolerant diaphragm vacuum pump Air Removal Capability: 50 cfm
Priming System	Priming Chamber: Cornell optimised priming chamber design and valve linkage for maximum reliability and zero carryover

reliability and zero carryover
Discharge Check Valve: Patented Cornell Non return valve with optional 90 degree discharge and heavy duty flapper
Run Dry: Indefinite capability

mpeller	Type: Two Vane, High Head Enclosed Solids Handling Impeller design for large spherical solids pass through whilst providing optimal efficiency
	Size: 495 mm (19.50 ")

Volute	Heavy duty GG30 Gray Iron with 125# flanges
Mechanical	Tungsten Carbide v Silicon Carbide

Seal	rungsten Carbide v Silicon Carbide
Bearing & Shaft	Heavy-duty bearing housing with dual angular contact bearings on drive end and heavy duty shaft







ALL DATA IS FOR GUIDANCE PURPOSES ONLY






PERFORMANCE CHART (FOR GUIDANCE ONLY)

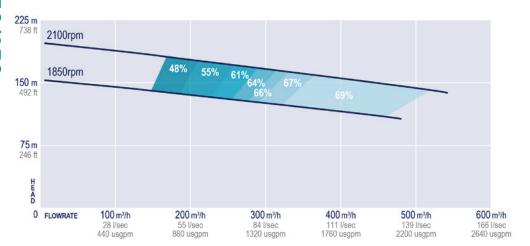

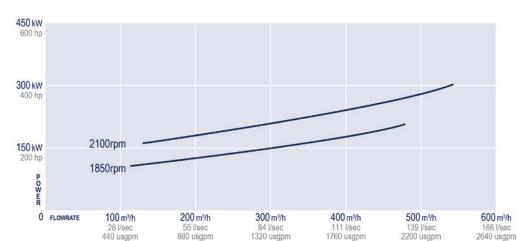

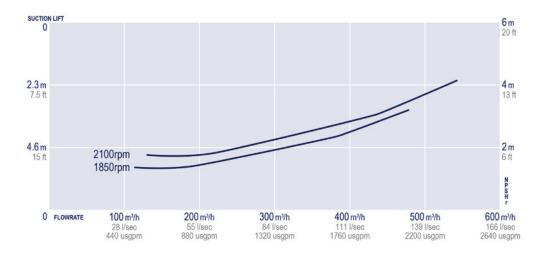

MARKETS







DXB, AT YOUR SERVICE



AROUND YOUR CLOCK, AROUND YOUR WORLD®

Anywhere, Anytime... DXB specialise in designing bespoke solutions to your fluid handling challenges.



WORLD CLASS ECO-FRIENDLY PRODUCTS

Like you, we care about the environment, which is why our efficient pumpsets use stage 5 emission compliant engines as standard.



WARRANTY & AFTERCARE

Our aftermarket team are here to support your business for the life of the pumpset. All products come with market leading warranty period for the absolute peace of mind.



REAL TIME ASSET CONTROL

Downtime isn't an option. All our pumpsets can be remotely monitored for ultimate asset control and performance.



YOUR TRUSTED PARTNER

Our customers support us, we support them. We're partners!