

# DE600/100



DEWATERING

FLOW @ BEP	HEAD @ BEP	SPEED @ BEP	EFFICIENCY @ BEP
590 m <sup>3</sup> /hr 2560 usgpm	100 mtrs 331'	1780 rpm	76%

## AT A GLANCE

Suction Size	200 mm	8"
Discharge Size	150 mm	6"
Solids Handling	51 mm (min)	2" (min)
Max Flow	870 m <sup>3</sup> /hr	3820 usgpm
Max Head	115 mtrs	385'
Max Speed	1800 rpm	

## DIESEL ENGINE SPECIFICATION

### CHOOSE DIESEL

Fuel Tank Size	450 ltrs	119 usg
Fuel Burn/hr @ BEP	64 ltrs/hr	16.90 usgph
Rated Power @ BEP	215 kW	288 hp
Model	Deutz TCD7.8L6	
Emissions	EU Stage V	
Max Power	260 kW	348 hp

## ELECTRIC MOTOR SPECIFICATION

### CHOOSE ELECTRIC

Model	WEG / ABB 415V 3 phase 50Hz	
Standard	IEC3	
Rated Power	250 kW	335 hp
Enclosure	TEFC	
Nominal Speed	1500 rpm	
Frame	315 L	

## FEATURES & BENEFITS

Indefinite Dry-Run capabilities
Auto Start/Stop
UK Manufactured
Cycloseal – advanced mechanical seal that extends seal life, reduces seal failures and maximises uptime

**2.90 HOURS**

To empty an Olympic Swimming Pool (2,500,000 litres) at Max Flow (870 m<sup>3</sup>/hr)



## NET WEIGHT

4100 kgs  
9040 lbs

## L x W x H

4.25 x 1.60 x 2.20 mtr  
167 x 63 x 87"

## PUMP SPECIFICATION

Model	CRP150MX460
Priming System	<p><b>Type:</b> Cornell liquid tolerant diaphragm vacuum pump</p> <p><b>Air Removal Capability:</b> 50 cfm</p> <p><b>Priming Chamber:</b> Cornell optimised priming chamber design and valve linkage for maximum reliability and zero carryover</p> <p><b>Discharge Check Valve:</b> Patented Cornell Non return valve with optional 90 degree discharge and heavy duty flapper</p> <p><b>Run Dry:</b> Indefinite capability</p>
Impeller	<p><b>Type:</b> Four Vane, High Head Enclosed Clear Liquids Impeller design providing optimal efficiency</p> <p><b>Size:</b> 460 mm (18.11")</p>
Volute	Heavy duty GG30 Gray Iron with 125# flanges
Mechanical Seal	Tungsten Carbide v Silicon Carbide
Bearing & Shaft	Heavy-duty bearing housing with dual angular contact bearings on drive end and heavy duty shaft




ALL DATA IS FOR GUIDANCE PURPOSES ONLY

+44(0)1473 833939 | SALES@DXBINTEGRATE.COM | WWW.DXBINTEGRATE.COM

AROUND YOUR CLOCK, AROUND YOUR WORLD®

DE600/100-0221

PERFORMANCE CHART (FOR GUIDANCE ONLY)

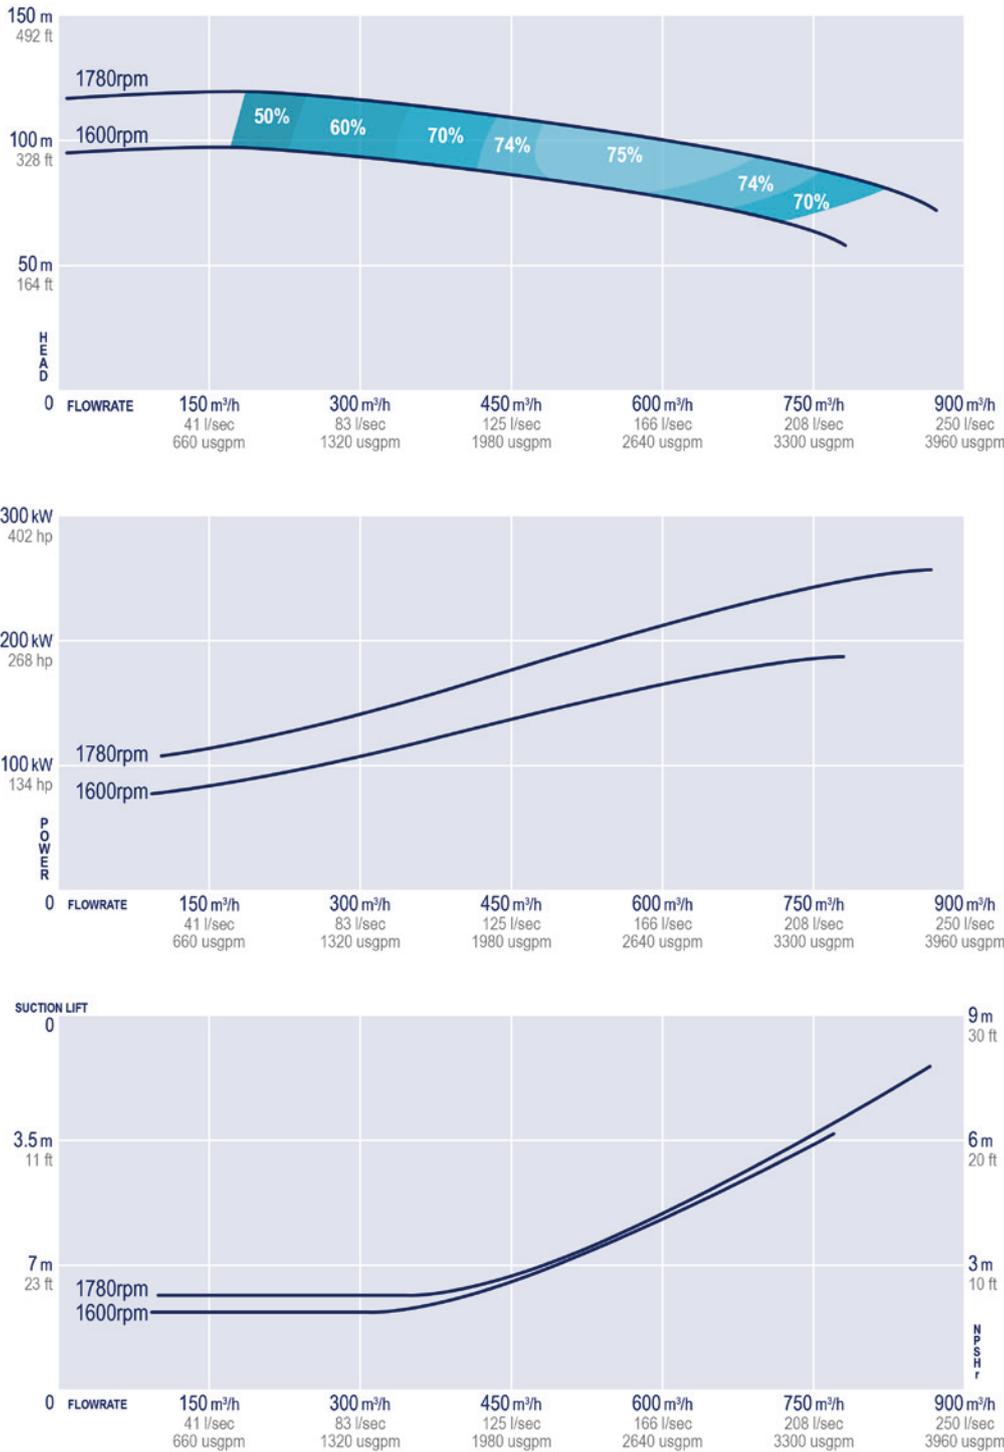

DXB, AT YOUR SERVICE



AROUND YOUR CLOCK, AROUND YOUR WORLD®

Anywhere, Anytime...  
DXB specialise in designing bespoke solutions to your fluid handling challenges.



WORLD CLASS ECO-FRIENDLY PRODUCTS

Like you, we care about the environment, which is why our efficient pumpsets use stage 5 emission compliant engines as standard.



WARRANTY & AFTERCARE

Our aftermarket team are here to support your business for the life of the pumpset. All products come with market leading warranty period for the absolute peace of mind.



REAL TIME ASSET CONTROL

Downtime isn't an option. All our pumpsets can be remotely monitored for ultimate asset control and performance.



YOUR TRUSTED PARTNER

Our customers support us, we support them. We're partners!

MARKETS

