

GI140/55



FLOW @ BEP	HEAD @ BEP	SPEED @ BEP	EFFICIENCY @ BEP
55 m ³ /hr 240 usgpm	140 mtrs 460'	1900 rpm	79%

AT A GLANCE

Suction Size	125 mm	5"
Discharge Size	80 mm	3"
Solids Handling	13 mm (min)	0.50" (min)
Max Flow	170 m ³ /hr	750 usgpm
Max Head	64 mtrs	210'
Max Speed	1900 rpm	

DIESEL ENGINE SPECIFICATION

CHOOSE DIESEL

Fuel Tank Size	450 ltrs	119 usg
Fuel Burn/hr @ BEP	8 ltrs/hr	2.10 usgph
Rated Power @ BEP	26 kW	45 hp
Model	Deutz TD2.9	
Emissions	EU Stage V	
Max Power	55 kW	74 hp

ELECTRIC MOTOR SPECIFICATION

CHOOSE ELECTRIC

Model	WEG / ABB 415V 3 phase 50Hz	
Standard	IEC3	
Rated Power	55 kW	74 hp
Enclosure	TEFC	
Nominal Speed	1500 rpm	
Frame	250	

FEATURES & BENEFITS

Indefinite Dry-Run capabilities
Auto Start/Stop
UK Manufactured
Cycloseal – advanced mechanical seal that extends seal life, reduces seal failures and maximises uptime

14.25 HOURS

To empty an Olympic Swimming Pool
(2,500,000 litres) at Max Flow (170 m³/hr)



NET WEIGHT

2350 kgs
5180 lbs

L x W x H

2.85 x 1.20 x 2.00 mtr
112 x 47 x 78"

PUMP SPECIFICATION

Model	CRP80RB327
Priming System	<p>Type: Cornell liquid tolerant diaphragm vacuum pump</p> <p>Air Removal Capability: 50 cfm</p> <p>Priming Chamber: Cornell optimised priming chamber design and valve linkage for maximum reliability and zero carryover</p> <p>Discharge Check Valve: Patented Cornell Non return valve with optional 90 degree discharge and heavy duty flapper</p> <p>Run Dry: Indefinite capability</p>
Impeller	<p>Type: Seven Vane Enclosed Clear Liquids Impeller design providing optimal efficiency</p> <p>Size: 327 mm (12.87")</p>
Volute	Heavy duty GG30 Gray Iron with 125# flanges
Mechanical Seal	Tungsten Carbide v Silicon Carbide
Bearing & Shaft	Heavy-duty bearing housing with dual angular contact bearings on drive end and heavy duty shaft




ALL DATA IS FOR GUIDANCE PURPOSES ONLY

+44(0)1473 833939 | SALES@DXBINTEGRATE.COM | WWW.DXBINTEGRATE.COM

AROUND YOUR CLOCK, AROUND YOUR WORLD®

GENERAL INDUSTRY

PERFORMANCE CHART (FOR GUIDANCE ONLY)

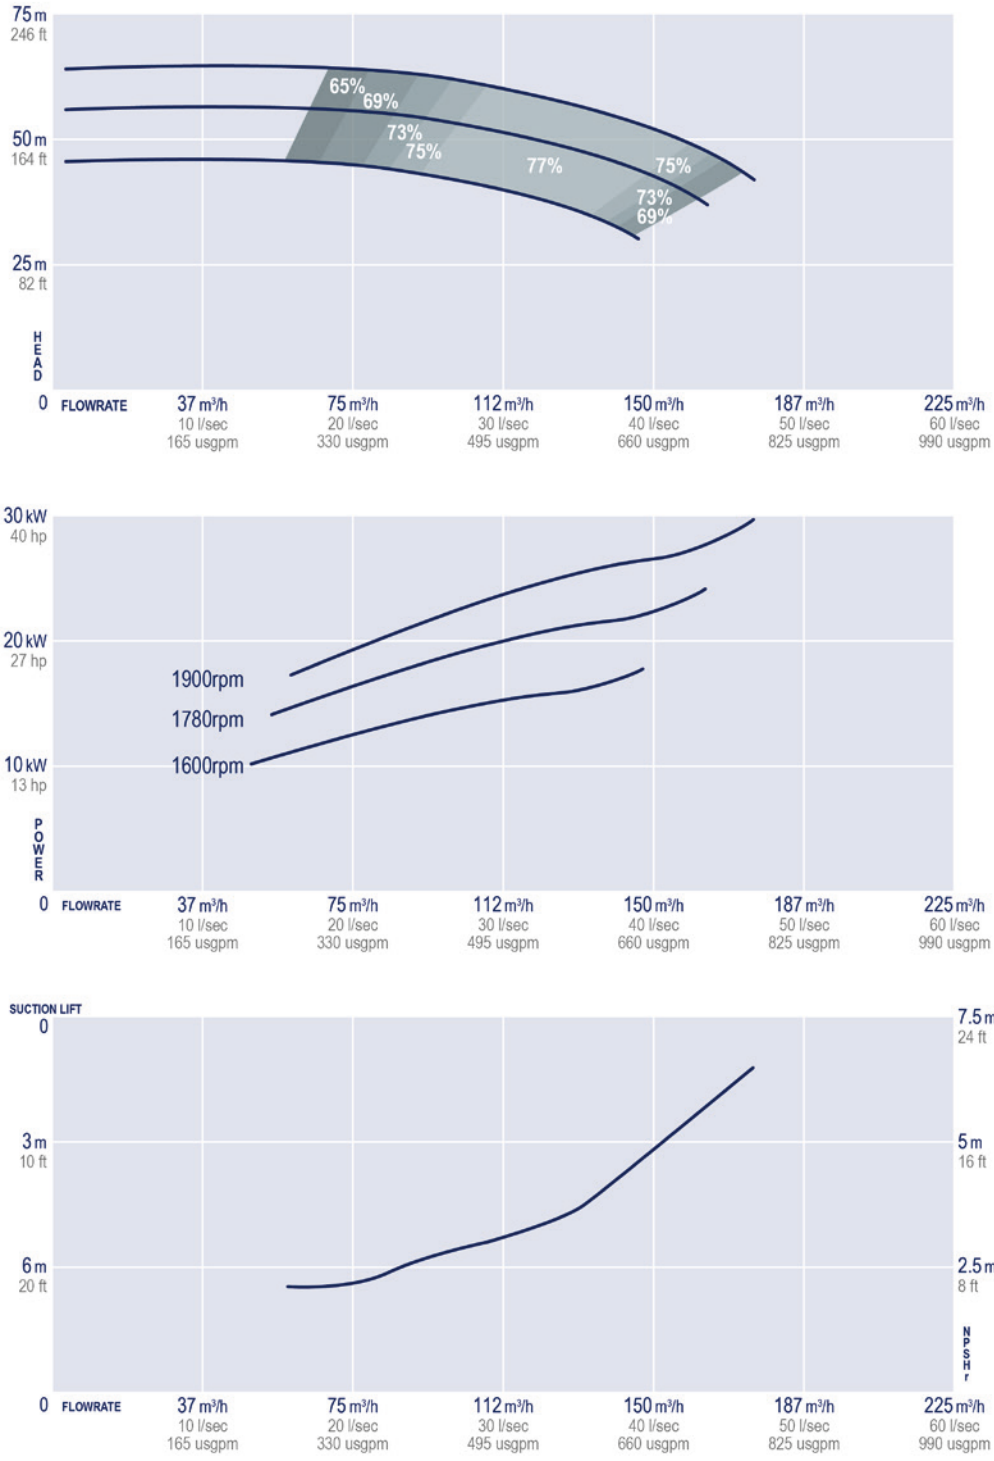

DXB, AT YOUR SERVICE



AROUND YOUR CLOCK, AROUND YOUR WORLD®

Anywhere, Anytime...
DXB specialise in designing bespoke solutions to your fluid handling challenges.



WORLD CLASS ECO-FRIENDLY PRODUCTS

Like you, we care about the environment, which is why our efficient pumpsets use stage 5 emission compliant engines as standard.



WARRANTY & AFTERCARE

Our aftermarket team are here to support your business for the life of the pumpset. All products come with market leading warranty period for the absolute peace of mind.



REAL TIME ASSET CONTROL

Downtime isn't an option. All our pumpsets can be remotely monitored for ultimate asset control and performance.



YOUR TRUSTED PARTNER

Our customers support us, we support them. We're partners!

MARKETS

