WW450/25 WARRIOR CUTTER





FLOW	HEAD	SPEED	EFFICIENCY
@ BEP	@ BEP	@ BEP	@ BEP
440 m³/hr 1940 usgpm	24 mtrs 79 '	1780 rpm	

AT A GLANCE		
Suction Size	200 mm	8 "
Discharge Size	200 mm	8 "
Solids Handling	86 mm (min)	3.40 " (min)
Max Flow	590 m ³ /hr	2600 usgpm
Max Head	34 mtrs	111 '
Max Speed	1800 rpm	

DIESEL ENGINE SPECIFI	CATION	CHOOSE DIESEL
Fuel Tank Size	450 Itrs	119 usg
Fuel Burn/hr @ BEP	13 ltrs/hr	3.45 usgph
Rated Power @ BEP	41 kW	56 hp
Model	Deutz TD2.9	
Emissions	EU Stage V	
Max Power	55 kW	74 hp

ELECTRIC MOTOR SPECIFICATION		CHOOSE ELECTRIC
Model	WEG / ABB 415	5V 3 phase 50Hz
Standard	IEC3	
Rated Power	55 kW	74 hp
Enclosure	TEFC	
Nominal Speed	1500 rpm	
Frame	250	

FEATURES & BENEFITS
Indefinate Dry-Run capabilities
Auto Start/Stop
UK Manufactured
Cycloseal – advanced mechanical seal that extends seal life, reduces seal failures and maximises uptime



To empty an Olympic Swimming Pool (2,500,000 litres) at Max Flow (590 m³/hr)



NET WEIGHT 2350 kgs 5180 lbs

 $L \times W \times H$ 2.85 × 1.20 × 2.00 mtr 112 × 47 × 78 '

DIII	ים פטבפ	IFICATION
PIIIV	IIP APFL	115 11.54 11.11

CRP200NNW280	
Type: Cornell liquid tolerant diaphragm vacuum pump CORNELL	
Air Removal Capability: 50 cfm	
Priming Chamber: Cornell optimised priming chamber design and valve linkage for maximum reliability and zero carryover	
Discharge Check Valve: Patented Cornell Non return valve with optional 90 degree discharge and heavy duty flapper	
Run Dry: Indefinite capability	
Type: Two Vane, WasteWarrior unique cutting impeller design for ragging conditions	
Size: 280 mm (11.02 ")	
Heavy duty GG30 Gray Iron with 125# flanges	
Tungsten Carbide v Silicon Carbide	
Heavy-duty bearing housing with dual angular contact bearings on drive end and heavy duty shaft	








ALL DATA IS FOR GUIDANCE PURPOSES ONLY



PERFORMANCE CHART (FOR GUIDANCE ONLY)

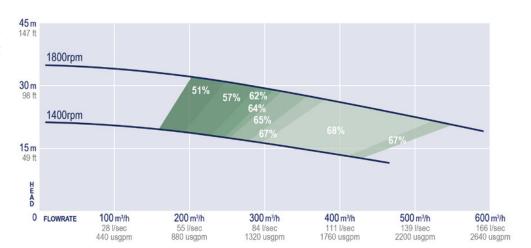

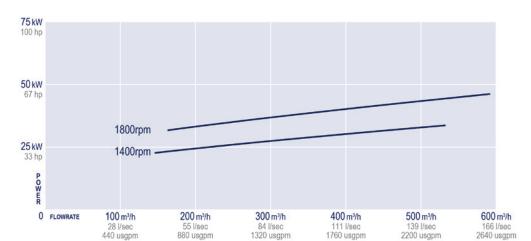

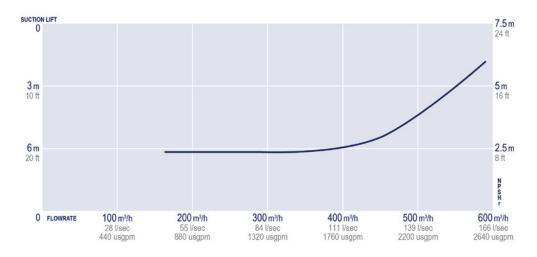

MARKETS







DXB, AT YOUR SERVICE



AROUND YOUR CLOCK, **AROUND YOUR WORLD®**

Anywhere, Anytime... DXB specialise in designing bespoke solutions to your fluid handling challenges.



WORLD CLASS ECO-FRIENDLY PRODUCTS

Like you, we care about the environment, which is why our efficient pumpsets use stage 5 emission compliant engines as standard.



WARRANTY & AFTERCARE

Our aftermarket team are here to support your business for the life of the pumpset. All products come with market leading warranty period for the absolute peace of mind.



REAL TIME ASSET CONTROL

Downtime isn't an option. All our pumpsets can be remotely monitored for ultimate asset control and performance.



YOUR TRUSTED PARTNER

Our customers support us, we support them. We're partners!