SP1100/170 SP1100/170 SP1100/170



FLOW @ BEP 1090 m³/hr 4790 usgpm AT A GLANCE	HEAD @ BEP 171 mtrs 561 '		SPEED @ BEP 1770 rpm		EFFICIENCY @ BEP 77%
Suction Size	2		50 mm		10 "
Discharge Size	2		00 mm		8 "
Solids Handling	ndling		60 mm (min)		2.40 " (min)
Max Flow		1620 m ³ /hr			7140 usgpm
Max Head		208 mtrs			682 '
Max Speed		1770 rpm			

DIESEL ENGINE SPECIFI	CHOOSE DIESEL			
Fuel Tank Size	450 Itrs	119 usg		
Fuel Burn/hr @ BEP	197 ltrs/hr	52.00 usgph		
Rated Power @ BEP	659 kW	884 hp		
Model	CAT 3512			
Emissions	Non Certified			
Max Power	1119 kW	1500 hp		

ELECTRIC MOTOR SPECIFICATION

CHOOSE ELECTRIC



FEATURES & BENEFITS

Indefinate Dry-Run capabilities

Auto Start/Stop

UK Manufactured

Cycloseal – advanced mechanical seal that extends seal life, reduces seal failures and maximises uptime



To empty an Olympic Swimming Pool (2,500,000 litres) at Max Flow (1620 m³/hr)

ALL DATA IS FOR GUIDANCE PURPOSES ONLY






PUMP SPECIFICATION				
CRP200MX616				
Type: Cornell liquid tolerant diaphragm vacuum pump CORNELL				
Air Removal Capability: 50 cfm				
Priming Chamber: Cornell optimised priming chamber design and valve linkage for maximum reliability and zero carryover				
Discharge Check Valve: Patented Cornell Non return valve with optional 90 degree discharge and heavy duty flapper				
Run Dry: Indefinite capability				
Type: Three Vane, CA6NM High Head Enclosed Clear Liquids Impeller design providing optimal efficiency				
Size: 673 mm (26.50 ")				
Heavy duty Ductile Iron with 125# flanges				
Tungsten Carbide v Silicon Carbide				
Heavy-duty bearing housing with dual angular contact bearings on drive end and heavy duty shaft				







→ +44(0)1473 833939 | SALES@DXBINTEGRATE.COM | NWW.DXBINTEGRATE.COM

PERFORMANCE CHART (FOR GUIDANCE ONLY)

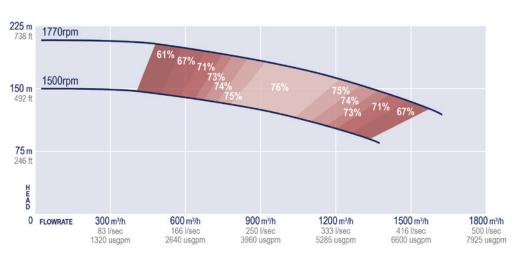

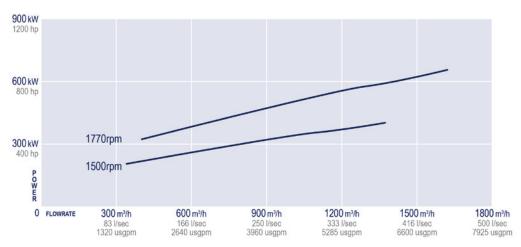

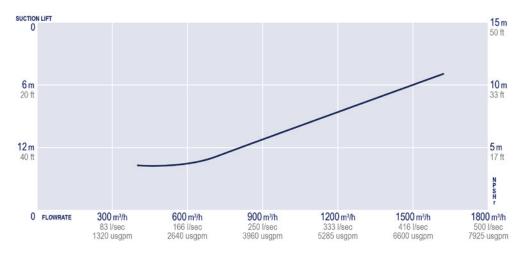



DXB, AT YOUR SERVICE



AROUND YOUR CLOCK, AROUND YOUR WORLD®

Anywhere, Anytime... DXB specialise in designing bespoke solutions to your fluid handling challenges.



WORLD CLASS ECO-FRIENDLY PRODUCTS

Like you, we care about the environment, which is why our efficient pumpsets use stage 5 emission compliant engines as standard.



WARRANTY & AFTERCARE

Our aftermarket team are here to support your business for the life of the pumpset. All products come with market leading warranty period for the absolute peace of mind.



REAL TIME ASSET CONTROL

Downtime isn't an option. All our pumpsets can be remotely monitored for ultimate asset control and performance.



YOUR TRUSTED PARTNER

Our customers support us, we support them. We're partners!

🧈 +44(0)1473 833939 | 🔤 SALES@DXBINTEGRATE.COM | 🕨 WWW.DXBINTEGRATE.COM

AROUND YOUR CLOCK, AROUND YOUR WORLD®