

DE500/200



CLEAR LIQUIDS



DEWATERING

FLOW @ BEP	HEAD @ BEP	SPEED @ BEP	EFFICIENCY @ BEP
500 m ³ /hr 2200 usgpm	200 mtrs 655'	1760 rpm	62%

AT A GLANCE

Suction Size	250 mm	10"
Discharge Size	200 mm	8"
Solids Handling	60 mm (min)	2.40" (min)
Max Flow	1490 m ³ /hr	6550 usgpm
Max Head	205 mtrs	655'
Max Speed	1760 rpm	

DIESEL ENGINE SPECIFICATION

CHOOSE DIESEL

Fuel Tank Size	450 ltrs	119 usg
Fuel Burn/hr @ BEP	133 ltrs/hr	35.15 usgph
Rated Power @ BEP	439 kW	589 hp
Model	CAT C32	
Emissions	EU Stage V	
Max Power	782 kW	1049 hp

ELECTRIC MOTOR SPECIFICATION

CHOOSE ELECTRIC

PLEASE GET IN TOUCH FOR MORE DETAILS

+44(0)1473 833939

SALES@DXBPUMPPOWER.COM

WWW.DXBPUMPPOWER.COM

FEATURES & BENEFITS

Indefinite Dry-Run capabilities

Auto Start/Stop

UK Manufactured

Cycloseal – advanced mechanical seal that extends seal life, reduces seal failures and maximises uptime

1.70 HOURS

To empty an Olympic Swimming Pool (2,500,000 litres) at Max Flow (1490 m³/hr)



DXB10

PLEASE GET IN TOUCH FOR MORE DETAILS ON PUMP SIZE

PUMP SPECIFICATION

Model	CRP200MX615
Priming System	<p>Type: Cornell liquid tolerant diaphragm vacuum pump</p> <p>Air Removal Capability: 50 cfm</p> <p>Priming Chamber: Cornell optimised priming chamber design and valve linkage for maximum reliability and zero carryover</p> <p>Discharge Check Valve: Patented Cornell Non return valve with optional 90 degree discharge and heavy duty flapper</p> <p>Run Dry: Indefinite capability</p>
Impeller	<p>Type: Three Vane, High Head Enclosed Clear Liquids Impeller design providing optimal efficiency</p> <p>Size: 616 mm (24.25")</p>
Volute	Heavy duty GG30 Gray Iron with 125# flanges
Mechanical Seal	Tungsten Carbide v Silicon Carbide
Bearing & Shaft	Heavy-duty bearing housing with dual angular contact bearings on drive end and heavy duty shaft






ALL DATA IS FOR GUIDANCE PURPOSES ONLY

+44(0)1473 833939 | SALES@DXBINTEGRATE.COM | WWW.DXBINTEGRATE.COM

AROUND YOUR CLOCK, AROUND YOUR WORLD®

DE500/200-0221

PERFORMANCE CHART (FOR GUIDANCE ONLY)

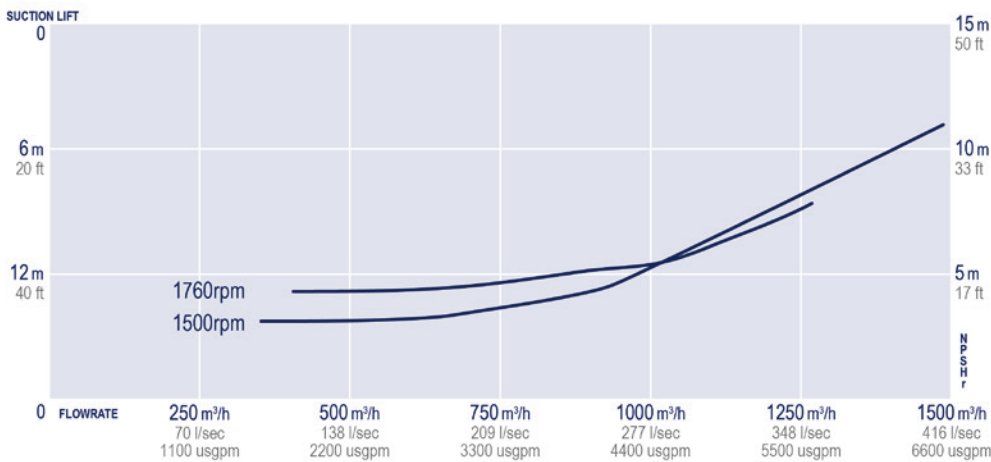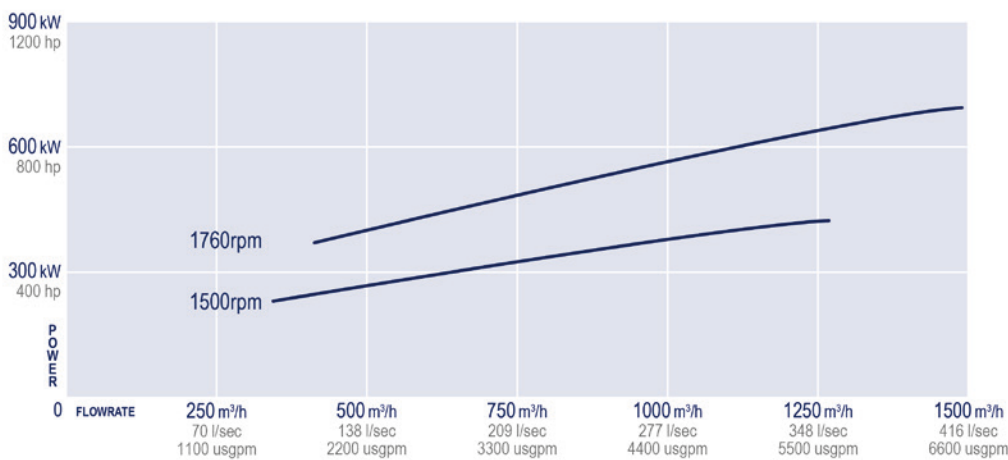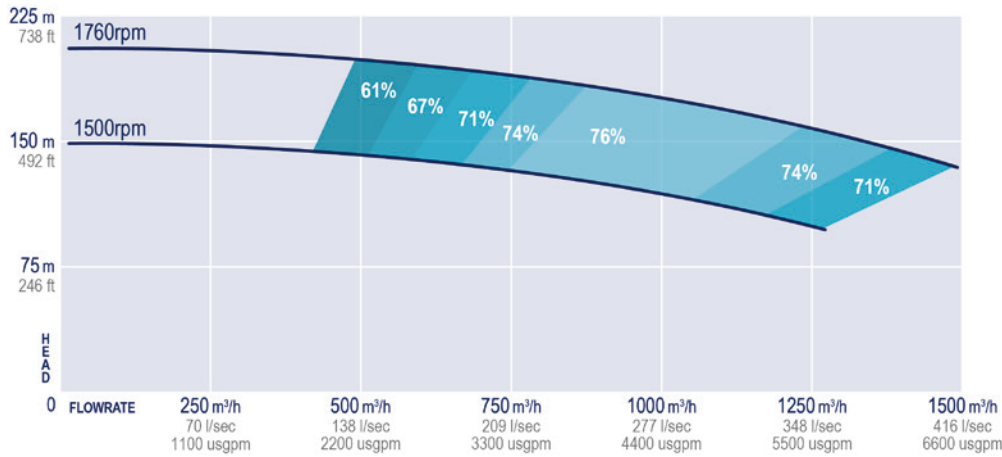

MARKETS



DXB, AT YOUR SERVICE



AROUND YOUR CLOCK, AROUND YOUR WORLD®

Anywhere, Anytime...
DXB specialise in designing bespoke solutions to your fluid handling challenges.



WORLD CLASS ECO-FRIENDLY PRODUCTS

Like you, we care about the environment, which is why our efficient pumpsets use stage 5 emission compliant engines as standard.



WARRANTY & AFTERCARE

Our aftermarket team are here to support your business for the life of the pumpset. All products come with market leading warranty period for the absolute peace of mind.



REAL TIME ASSET CONTROL

Downtime isn't an option. All our pumpsets can be remotely monitored for ultimate asset control and performance.



YOUR TRUSTED PARTNER

Our customers support us, we support them. We're partners!